


REV.	DESCRIPTION	DATE
1	PORPOSAL	Apr. 04, 2014
2	DRAW. MODIFY	Sep. 07, 2016

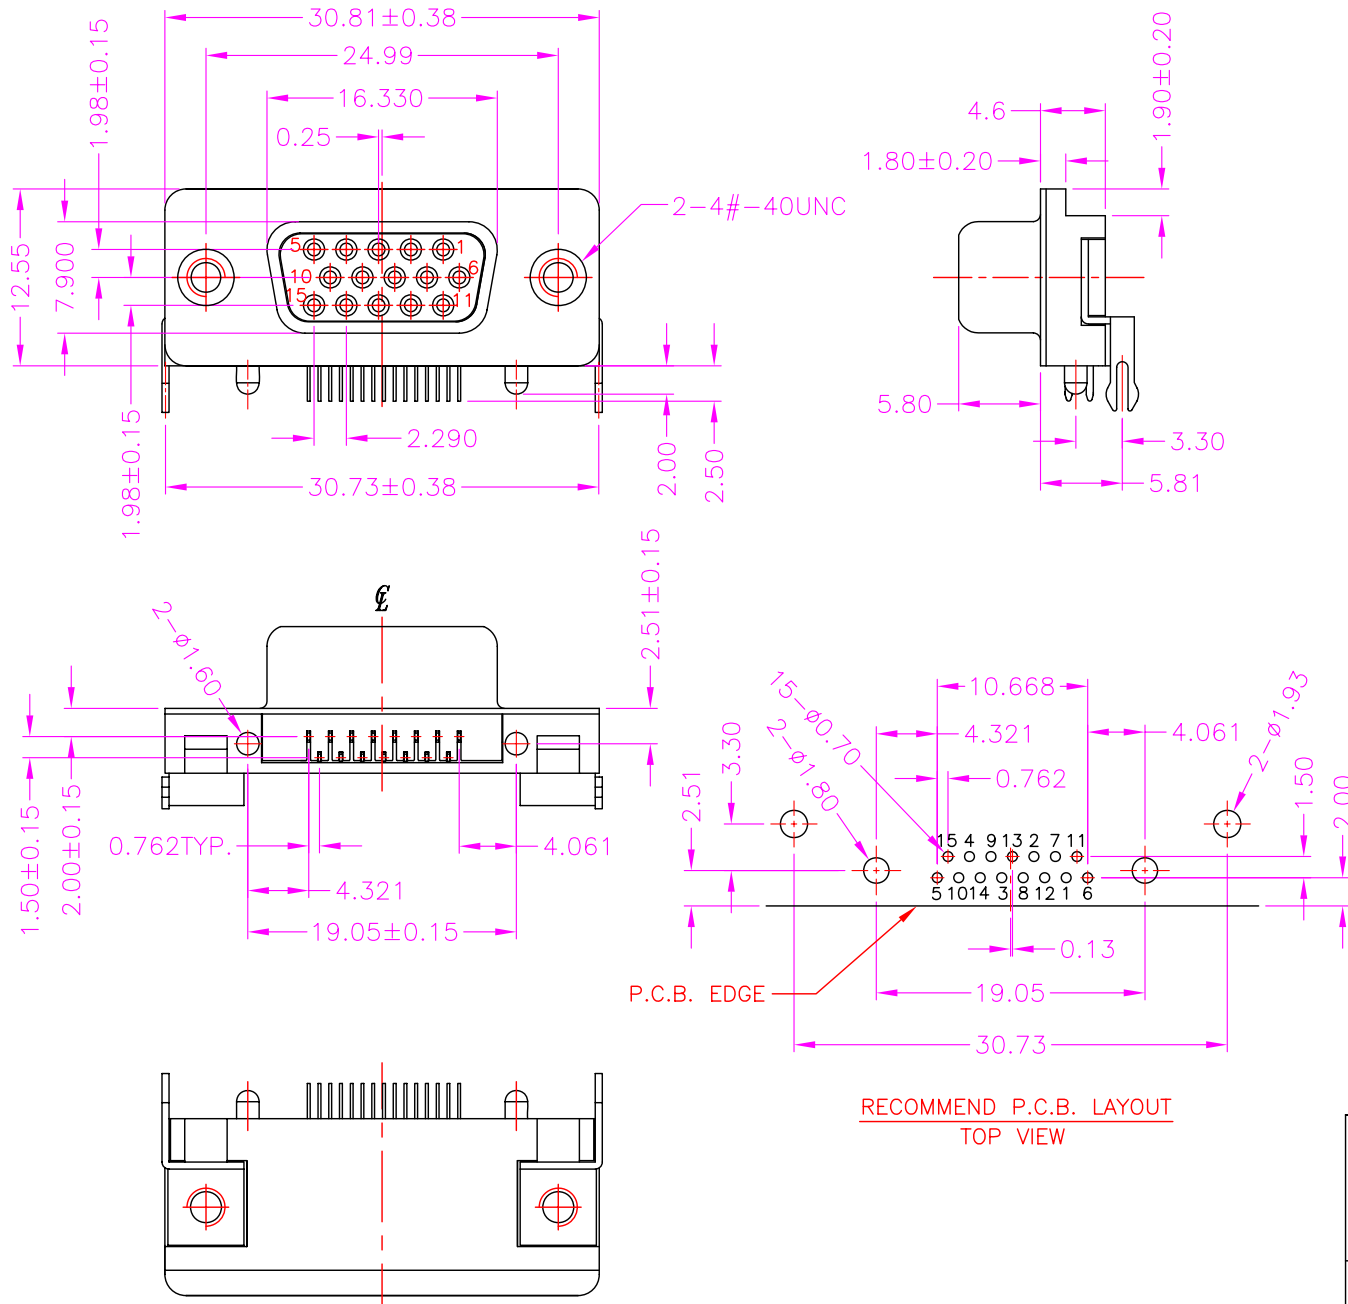


MATERIALS

- HOUSING : L.C.P, (UL 94V-0), BLUE.
- TERMINAL : BRASS, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL, UNDER NICKEL PLATED OVER ALL.
- SHELL : SPCC, NICKEL PLATING.
- BOARDLOCK : COPPER ALLOY, TIN PLATING.
- RIVET : COPPER ALLOY, NICKEL PLATING.


SPECIFICATION

- CURRENT RATING : 3 AMP. MAX.
- RATING VOLTAGE : 250V AC MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
- CONTACT RESISTANCE : 25m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +85°C.
- MATING FORCE : 6.0 Kgf MAX.
- UNMATING FORCE : 1.2 Kgf MIN.

PART NUMBER INFORMATION :

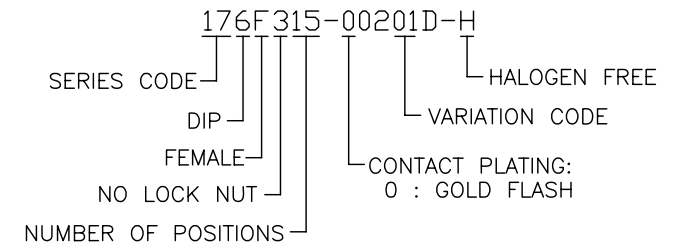

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±0.38 .00=±0.25 .000=±0.13 ANG.=±3°	DRAWER <i>JIN</i>	Astron ASTRON TECHNOLOGY CORP.
	CHECK <i>N76028</i>	
 UNITS : mm	APP'D <i>ERJ6</i>	NAME HDD-SUB 15PIN SLIM TYPE
	PRODUCT SPEC. ---	DRAW NO. 176F315-00201D-H
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. 2	07002