REV.	DESCRIPTION	DATE
A	RELEASE	OCT 20, 2009
B	10'0322	MAR 16, 2010
C	N15'07014	Jul 14, 2015
D	ADD DIM	Sep 19, 2015

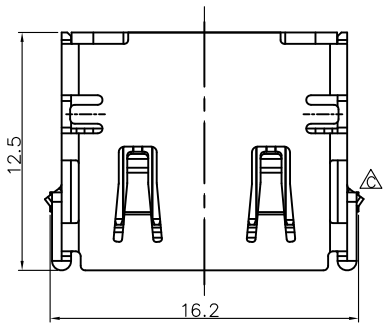

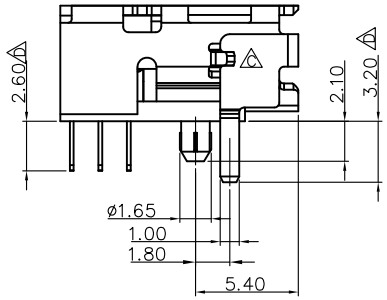

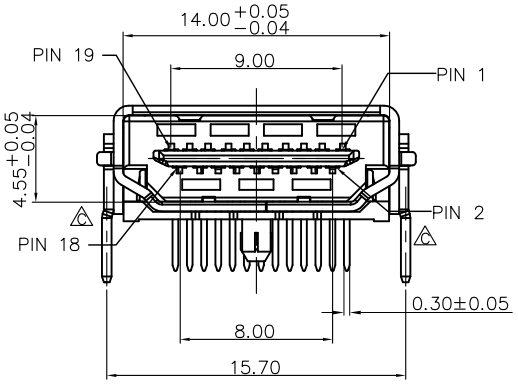

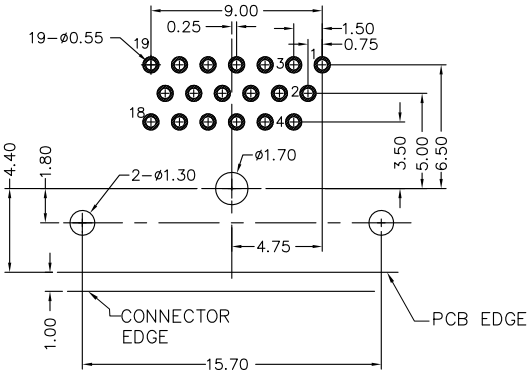

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

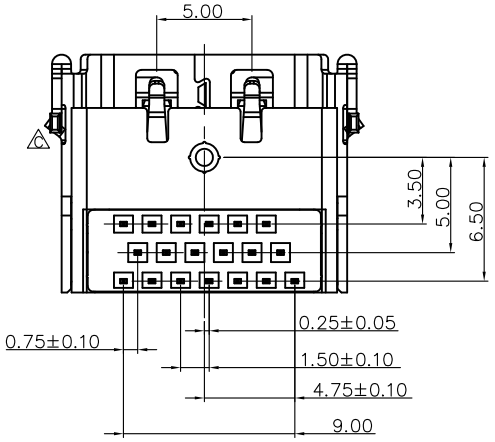

MATERIALS

1. HOUSING : HIGH TEMP.THERMOPLASTIC, (UL 94V−0) BLACK.
2. TERMINAL : COPPER ALLOY.GOLD PLATED.
3. SHELL : COPPER ALLOY.NICKEL PLATED.

SPECIFICATION

1. CURRENT RATING :0.5A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX(DELTA VALUE).
5. OPERATING TEMPERATURE : −25°C TO +85°C.

PART NUMBER INFORMATION:

3660019−X02−R

- 3660019: SERIES CODE
- X: R/A 90° DIP
- 02: FEMALE, NUMBER OF POSITIONS
- R: RoHS
- FOLLOW NUMBER: CONTACT PLATING:
  - 0: GOLD FLASH
  - 3: 15u" GOLD
  - 6: 30u" GOLD

TOLERANCE .0=±0.25 .00=±0.20 .000=±0.15 ANG.=±2°	DRAWER Stony	Astron ASTRON TECHNOLOGY CORP.	
	CHECK Stony		
	APP'D Sigurd	NAME HDMI−A/F 19PIN Dip 90° ⚠ 3 ROWS CONNECTOR	
UNITS : mm [inch]	PRODUCT SPEC. —	DRAW NO. R3660019−X02−R	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. D	TK	