
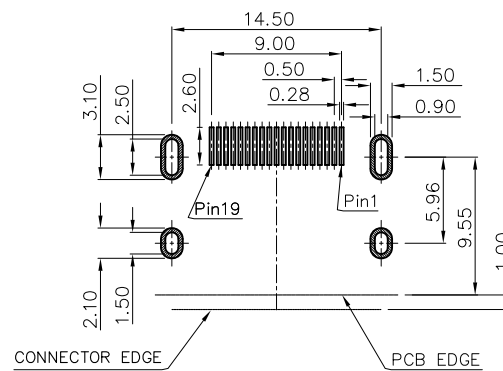
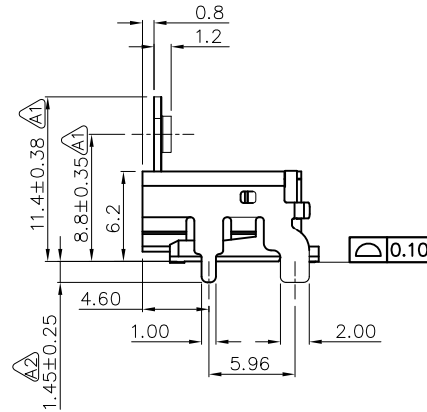

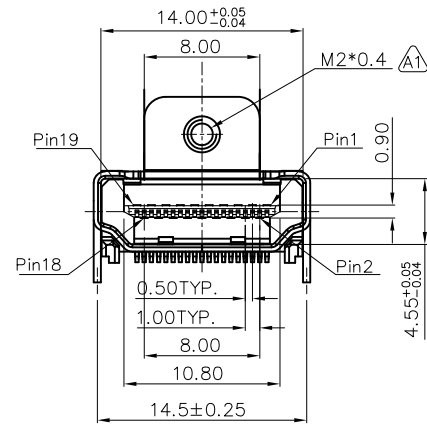


REV.	DESCRIPTION	DATE
A0	RELEASE	Feb 14, 2017
A1		Feb 20, 2017
A2	CHANGE DRAWING	Mar 28, 2017

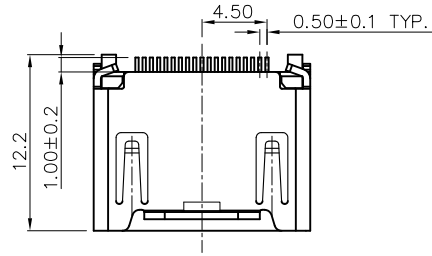

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW


### MATERIALS

- HOUSING : HI-TEMP.PLASTIC(UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY,  
PLATING : GOLD PLATED ON CONTACT AREA,TIN PLATED ON SOLDER TAILS.
- SHELL : COPPER ALLOY,  
PLATING : NICKEL PLATED OVERALL.



### SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN.AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- INSERTION FORCE : 4.5Kgf MAX.
- WITHDRAWING FORCE : 1Kgf ~ 4Kgf.

### PART NUMBER INFORMATION :

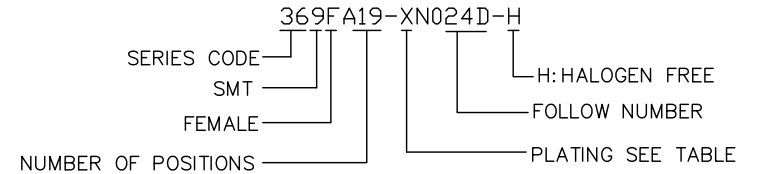

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER <i>Duan</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>Shony</i>	
	APP'D <i>Shony</i>	NAME HDMI FEMALE A TYPE+FLANGE, SMT TYPE
	PRODUCT SPEC. —	DRAW NO. R369FA19-XN024D-H
UNITS : mm	SCALE NONE SIZE A6	SHEET 1 OF 1 REV. A2