
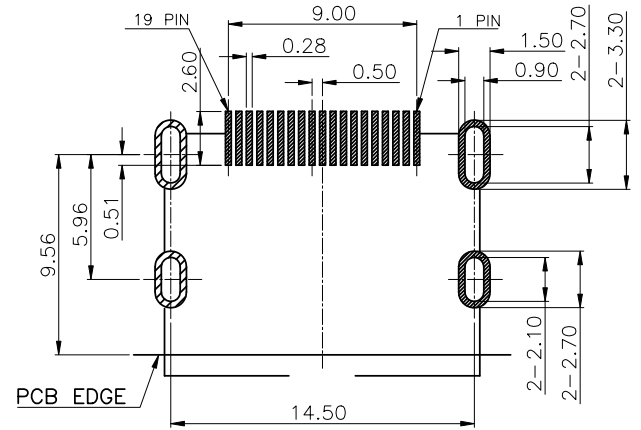
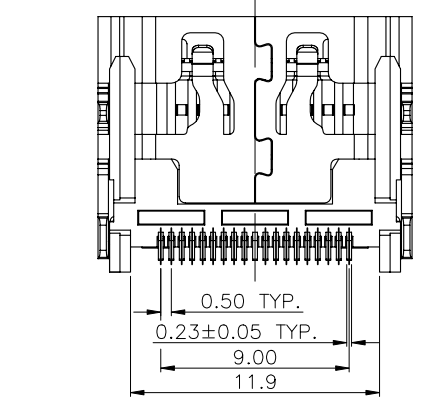

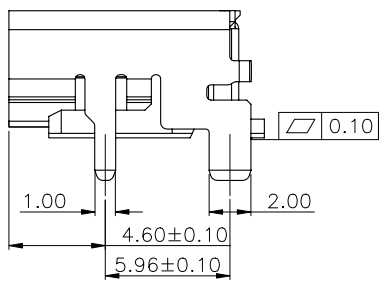
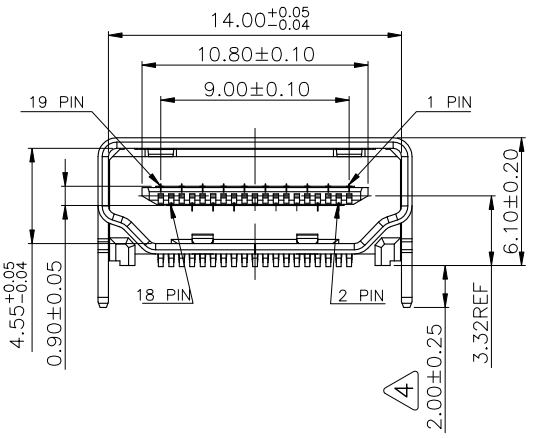
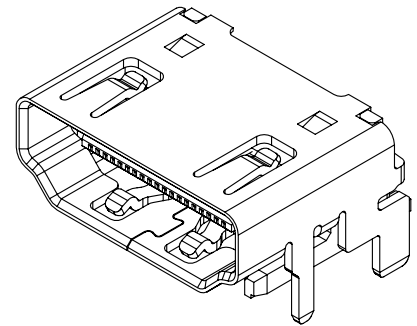


REV.	DESCRIPTION	DATE
A	N19'05007	May.15, 2019

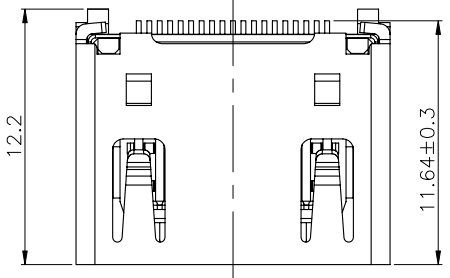

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW


**MATERIALS**

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY,  
PLATING : GOLD PLATED ON CONTACT AREA,  
TIN PLATED ON SOLDER TAILS.  
NICKEL PLATED OVERALL.
- SHELL : COPPER ALLOY,  
PLATING : NICKEL PLATED OVERALL.
- EMI SHIELD : STEEL.

**SPECIFICATION**

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100M $\Omega$  MIN.AT 500V DC.
- CONTACT RESISTANCE : 30m $\Omega$  MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- INSERTION FORCE : 4.5Kgf MAX.
- WITHDRAWING FORCE : 1Kgf ~ 4Kgf.

**PART NUMBER INFORMATION :**



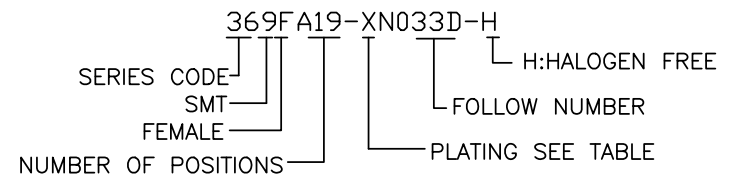


DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER Chen CHECK Stony APP'D Stony	 <b>ASTRON TECHNOLOGY CORP.</b> NAME HDMI A 2.1 TYPE FEMALE	
 UNITS : mm	PRODUCT SPEC.		DRAW NO. R369FA19-XN033D-H
SCALE NONE	SIZE A7	SHEET 1 OF 2	REV. A



REV.	DESCRIPTION	DATE
A	N19'05007	May.15, 2019

3

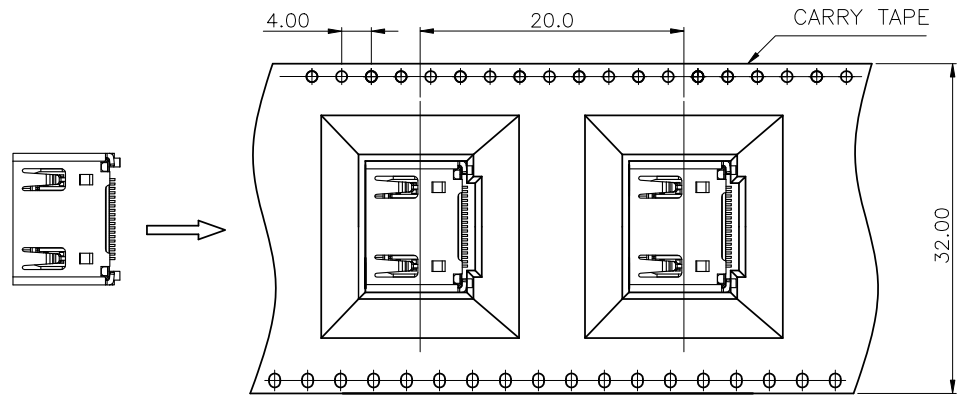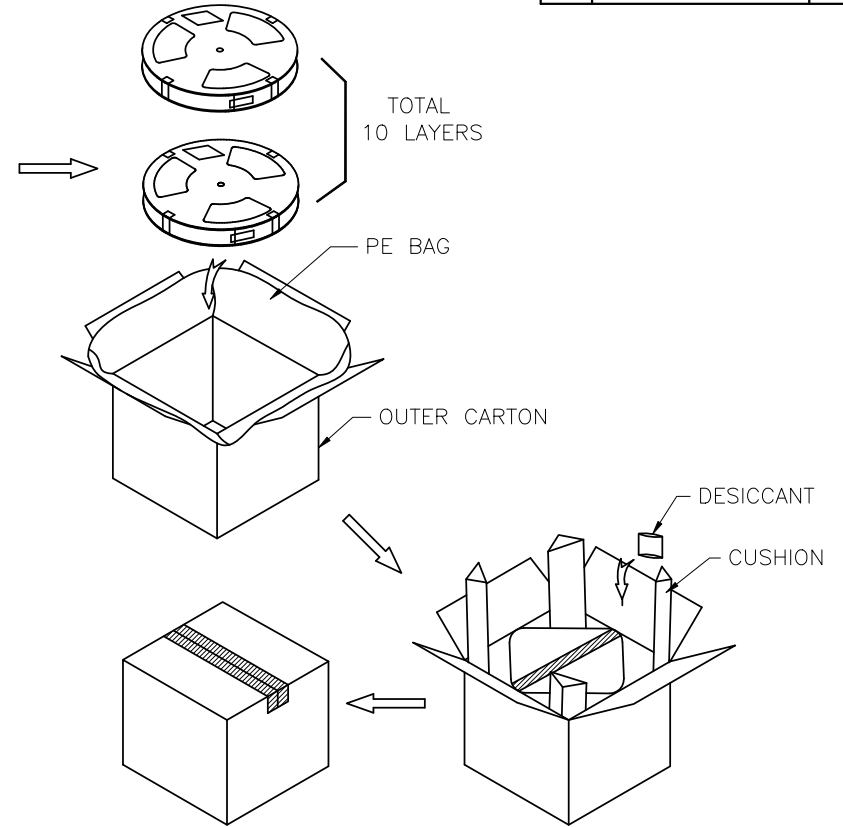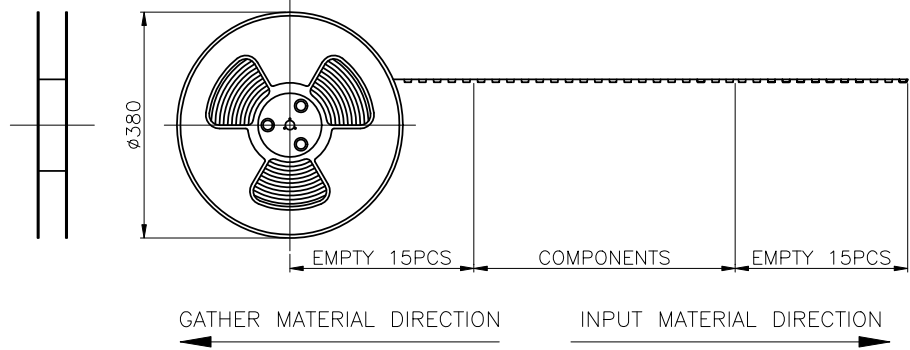

**PACKAGE :**

1. CORTON SIZE: 400x400x400mm (LxWxH)
2. 500 PCS/REEL
3. 10 REEL/CARTON = 5000PCS

<b>TOLERANCE</b> .0≥±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER Chen	 <b>ASTRON TECHNOLOGY CORP.</b>
	CHECK Stony	
 UNITS : mm	APP'D Stony	HDMI A 2.1 TYPE FEMALE
	SCALE NONE	PRODUCT SPEC. —
SIZE A7	SHEET 2 OF 2	REV. A