由 Autodesk 教育版产品制作

REV.	DESCRIPTION	DATE
A	RELEASE	Mar 12, 2013

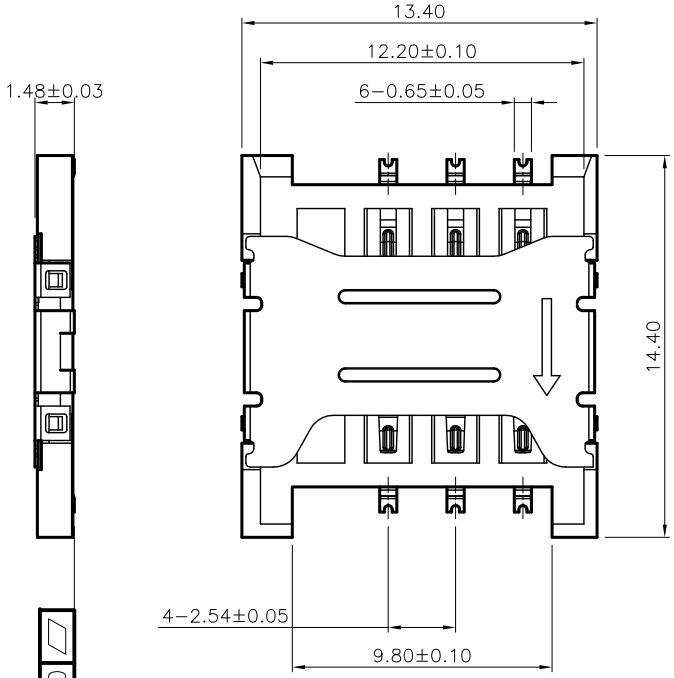

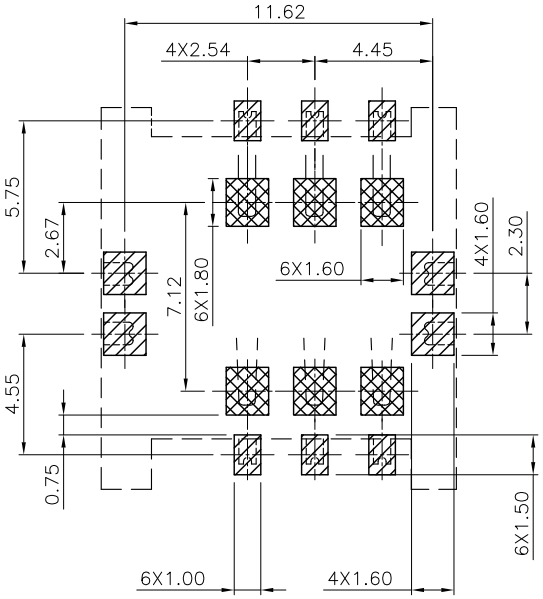

RECOMMENDED P.C.B. LAYOUT
TOLERANCE:±0.05 TOP VIEW

PCB AREA
CONNECT AREA
KEEP OUT AREA

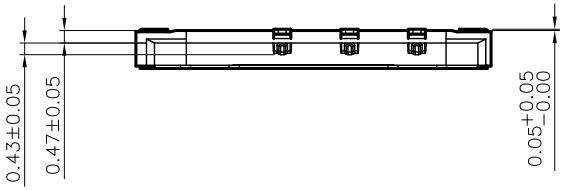



MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY,
   PLATING : GOLD PLATED ON CONTACT AREA AND SOLDER TAILS,NICKEL PLATED OVERALL.
3. SHELL : STAINLESS STEEL.
   PLATING : NICKEL PLATED OVERALL. GOLD PLATED ON SOLDER TAILS

SPECIFICATION

1. CURRENT RATING : 1.0 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

PART NUMBER INFORMATION :

5190106-X1005S-X

- SERIES CODE
- SMT 180°
- SIM CARD
- SINGLE TYPE
- NUMBER OF POSITIONS
- R:RoHS H:HALOGEN FREE
- FOLLOW NUMBER
- W/O PUSH
- INSERT TYPE
- PLATING SEE TABLE

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.10 ANG.=±3°	DRAWER JERRY CHECK JERRY APP'D KAWX	Astron ASTRON TECHNOLOGY CORP.
UNITS : mm	PRODUCT SPEC. —	NAME MICRO SIM SOCKET 6PIN 1.50H （焊接脚内折）
SCALE NONE / SIZE A8	SHEET 1 OF 1 / REV. A	DRAW NO. R5190106-X1005S-X

DRAWING NAME:R

由 Autodesk 教育版产品制作