

REV.	DESCRIPTION	DATE
A	RELEASE	Jun.05, 2019
B	MODIFY DIM	Jun.20, 2019
C	N20'03009	Mar.23, 2020


**MATERIALS**

- HOUSING : LCP (UL94V-0), BLACK.
- TERMINAL : COPPER ALLOY,  
GOLD PLATED ON CONTACT AREA.  
TIN PLATED ON SOLDER TAIL,  
UNDER NICKEL PLATED.
- SHELL : STAINLESS STEEL, NICKEL PLATED.
- MYLAR : POLYESTER FILM.



**SPECIFICATION**








- CURRENT RATING : 0.5A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 10000 CYCLES.
- MATING FORCE : 4.5kgf MAX.
- UNMATING FORCE : 1.0kgf MIN.

**PART NUMBER INFORMATION**


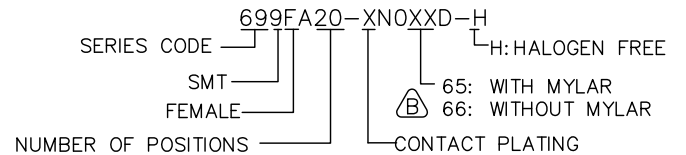


DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER <i>Shen</i>	 <b>ASTRON TECHNOLOGY CORP.</b>	
	CHECK <i>Stony</i>		APP'D <i>Stony</i>
	PRODUCT SPEC. _____		NAME DISPLAY PORT SMT TYPE FEMALE (SCREW THREAD M2)
UNITS : mm	SCALE NONE SIZE A4 SHEET 1 OF 2 REV. C		DRAW NO. R699FA20-XN065(66)D-H

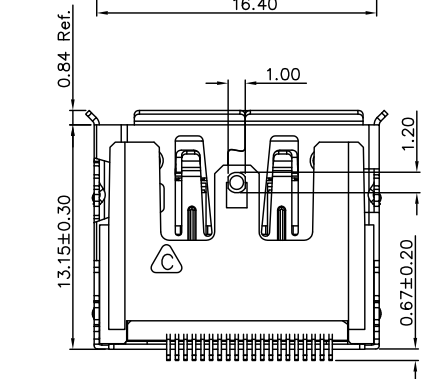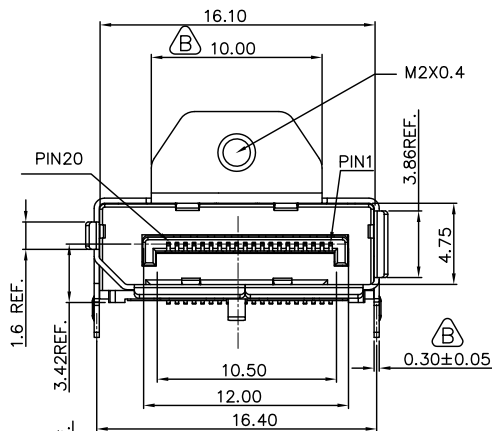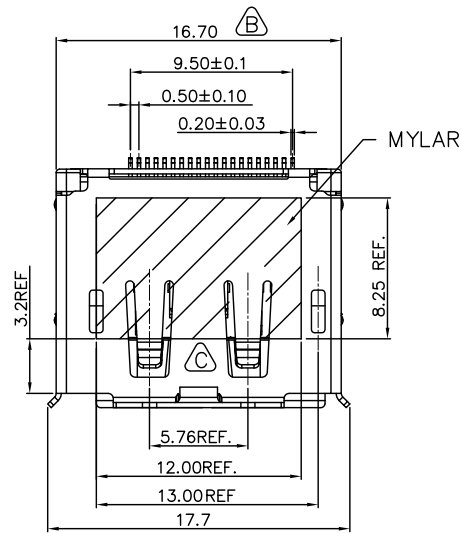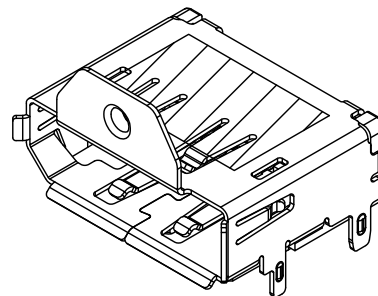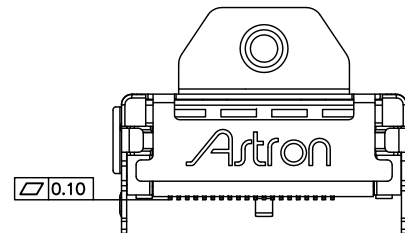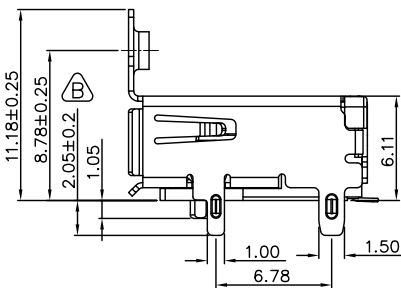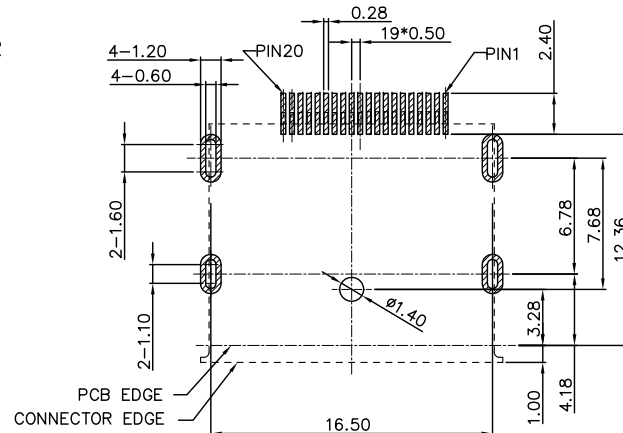

REV.	DESCRIPTION	DATE
A	RELEASE	Jun.05, 2019
B	MODIFY DIM	Jun.20, 2019
C	N20'03009	Mar.23, 2020

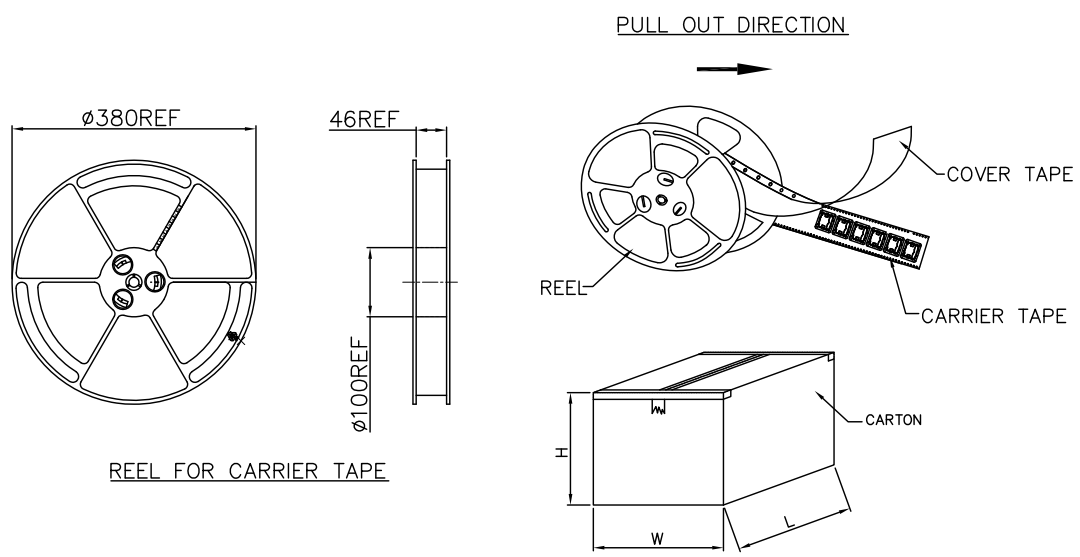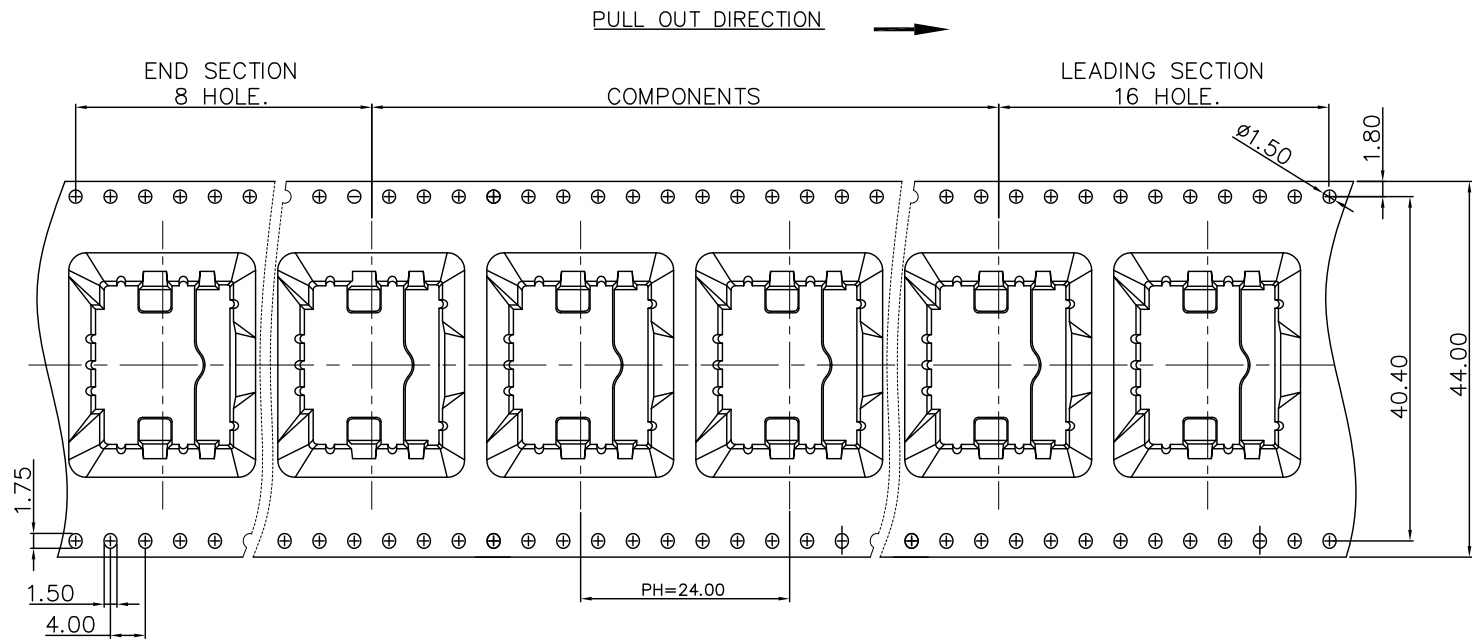



**TAPE & REEL PACKAGE :**

**MATERIALS**

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

**QUANTITY**

1. 250PCS PER REEL
  2. 5 REEL PER CARTON(1250PCS PER CARTON)
- (CARTON : L=400mm, W=400mm, H=270mm)

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		<b>DRAWER</b> <i>Shen</i> <b>CHECK</b> <i>Stony</i> <b>APP'D</b> <i>Stony</i>		 <b>ASTRON TECHNOLOGY CORP.</b> <b>NAME</b> DISPLAY PORT SMT TYPE FEMALE (SCREW THREAD M2)	
<b>UNITS : mm</b> 		<b>PRODUCT SPEC.</b> _____			
<b>SCALE</b> NONE	<b>SIZE</b> A4	<b>SHEET</b> 2 OF 2	<b>REV.</b> C	<b>DRAW NO.</b> R699FA20-XN065(66)D-H	