

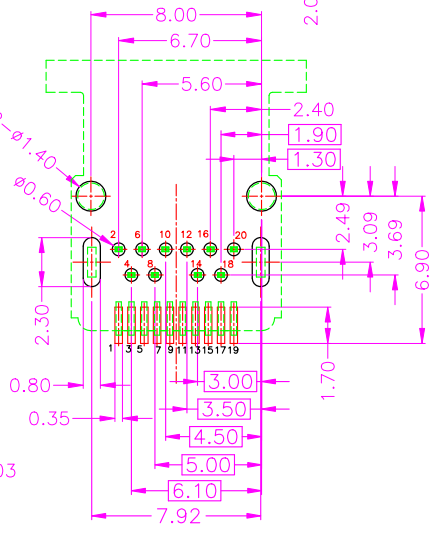
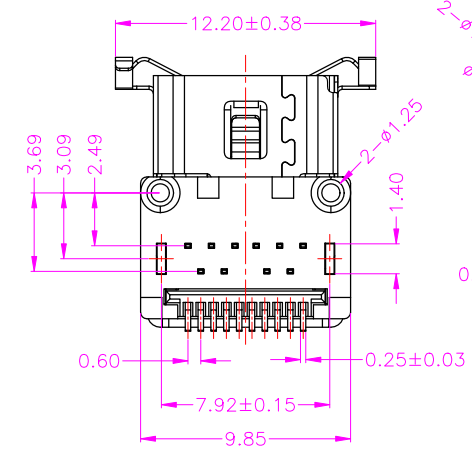
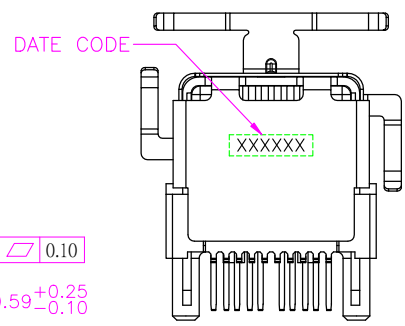
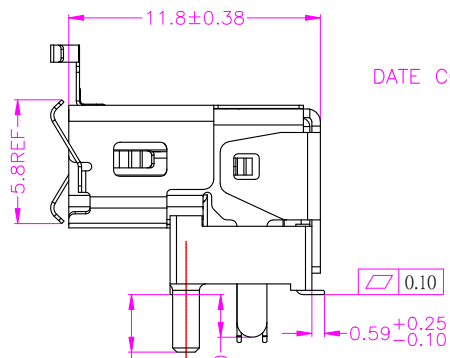
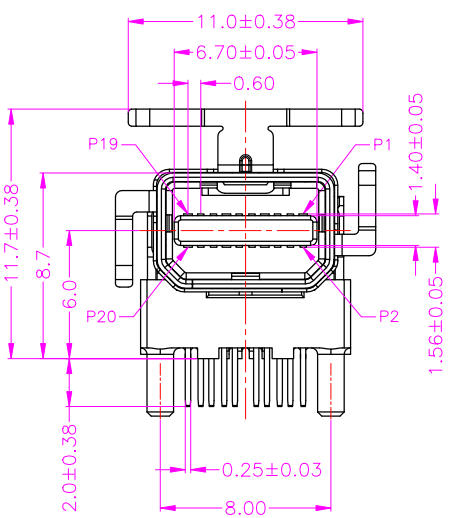
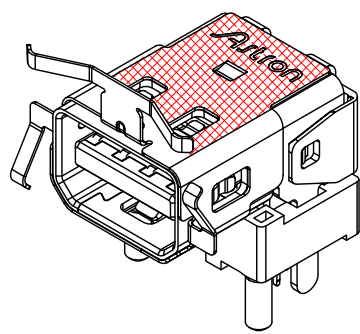


REV.	DESCRIPTION	DATE
A	N18'10009	Oct.27, 2018

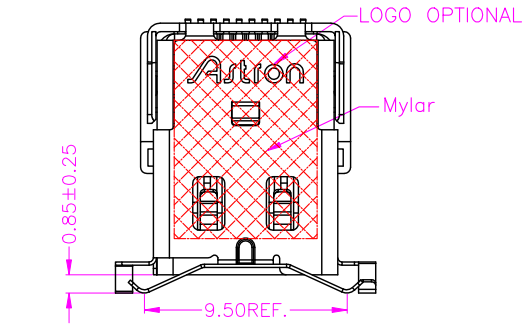

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

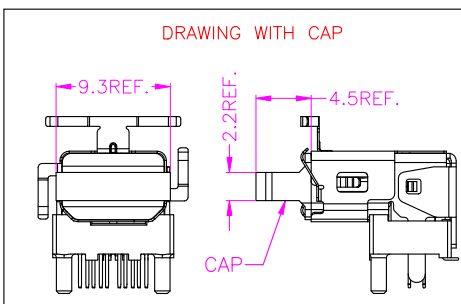


MATERIALS

1. HOUSING : HI-TEMP. PLASTIC, (UL 94V-0) BLACK.
2. COVER : HI-TEMP. PLASTIC, (UL 94V-0) BLACK.
3. TERMINAL : COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS,
NICKEL UNDER PLATED OVERALL.
4. SHELL : STAINLESS STEEL, NICKEL PLATED OVERALL.
5. SPRING SHELL : STAINLESS STEEL.

SPECIFICATION

1. CURRENT RATING : 0.5A MAX
2. CONTACT RESISTANCE : 30mΩ MAX.
3. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
4. INSULATION RESISTANCE : 100MΩ MIN AT 500V DC.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5Kgf MAX.
8. UNMATING FORCE : 1.0Kgf~4.0Kgf.







PART NUMBER INFORMATION :

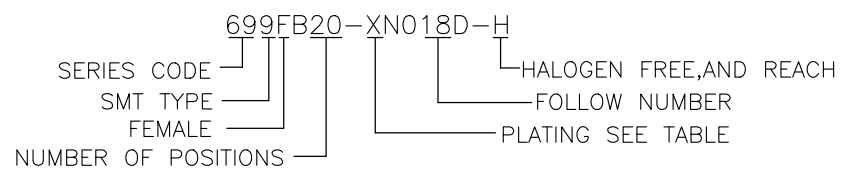

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u''
6	GOLD 30u''		



TOLERANCE .0=±0.25 .00=±0.15 .000=±XXX ANG.=±3'	DRAWER Chen	 ASTRON TECHNOLOGY CORP. NAME MINI DISPLAYPORT RECEPTACLE R/A DIP+SMT TYPE WITH EMI SPRING DRAW NO. 699FB20-XN018D-H	
	CHECK Stony		
	APP'D Stony		
	PRODUCT SPEC. —		
UNITS : mm			
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. A

REV.	DESCRIPTION	DATE
A	N18'10009	Oct.27, 2018

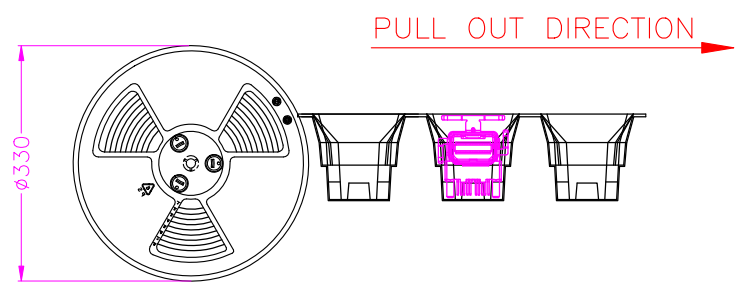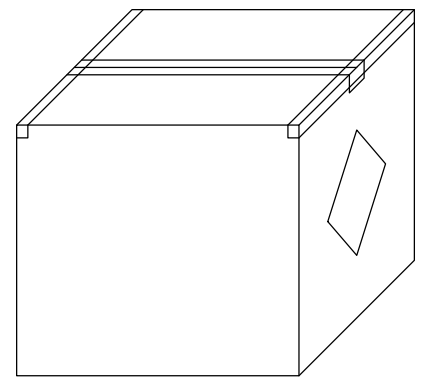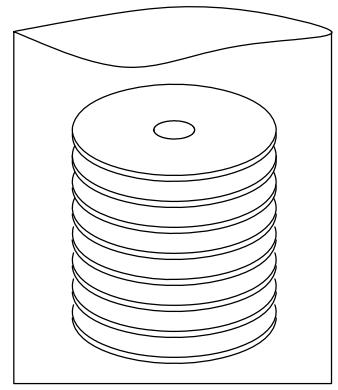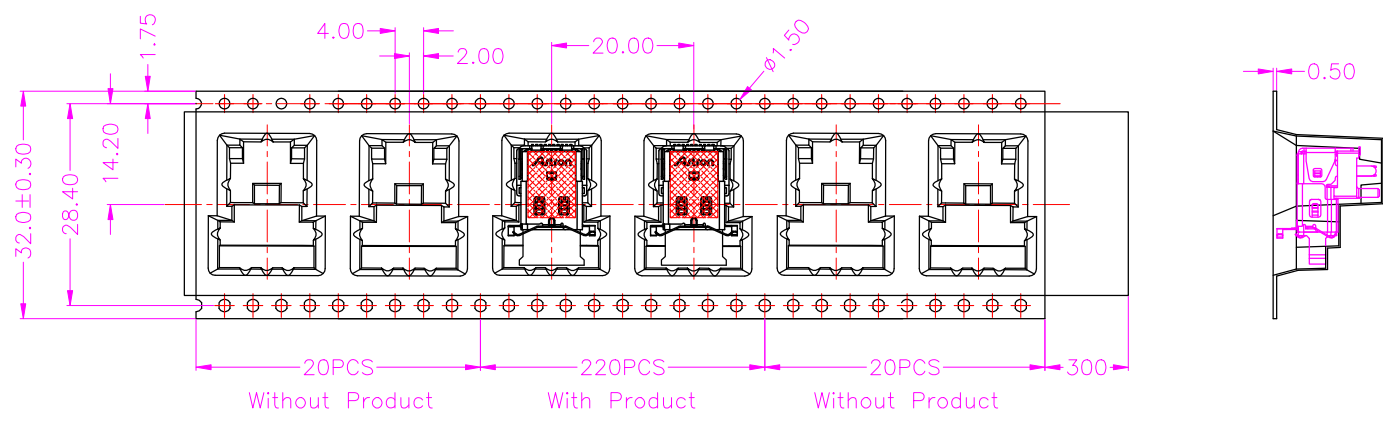

QUANTITY

- 1. 220PCS/REEL
- 2. 1760PCS/8 REEL/PER CARTON

TOLERANCE .0=±XXX .00=±0.10 .000=±XXX ANG.=±3'		DRAWER Duan		 ASTRON TECHNOLOGY CORP.
UNITS : mm		CHECK Stony		
		APP'D Stony		NAME MINI DISPLAYPORT RECEPTACLE R/A DIP+SMT TYPE WITH EMI SPRING
SCALE NONE		PRODUCT SPEC. —		DRAW NO. 699FB20-XN018D-H
SIZE A4	SHEET 2 OF 2	REV. A		