
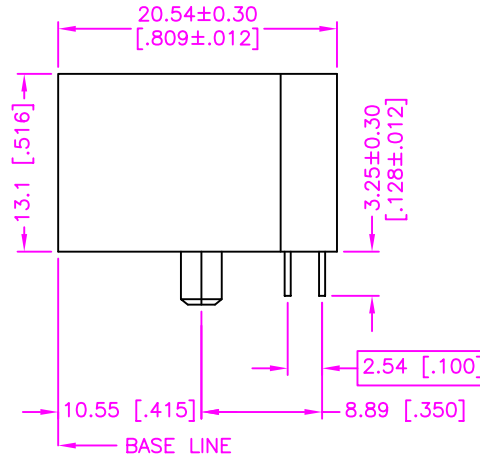


REV.	DESCRIPTION	DATE
A	RELEASE	Jan. 10, 2005
B		
C		

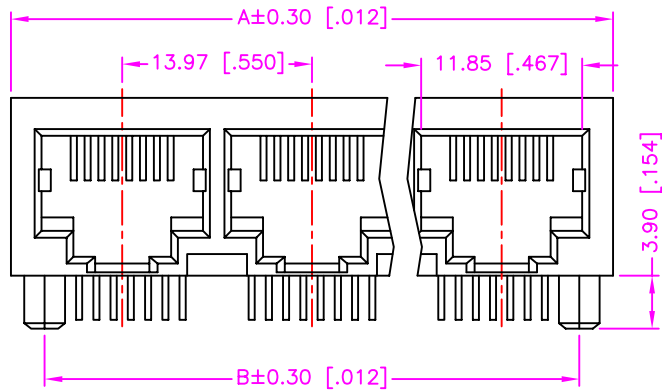




MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- TERMINAL : $\phi 0.45$ mm PHOSPHOR BRONZE.

SPECIFICATION

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO $+70^{\circ}\text{C}$.
- DURABILITY : 750 CYCLES.

ORDER INFORMATION :

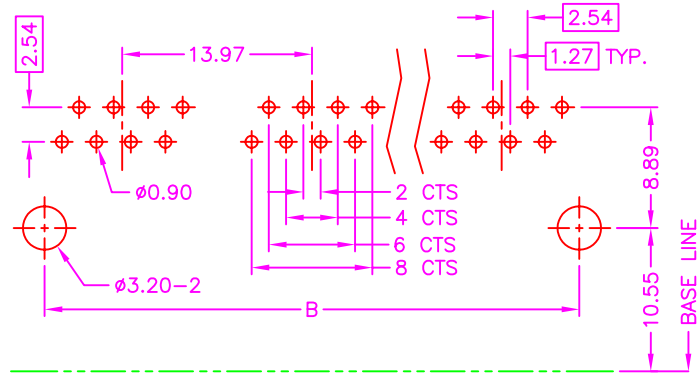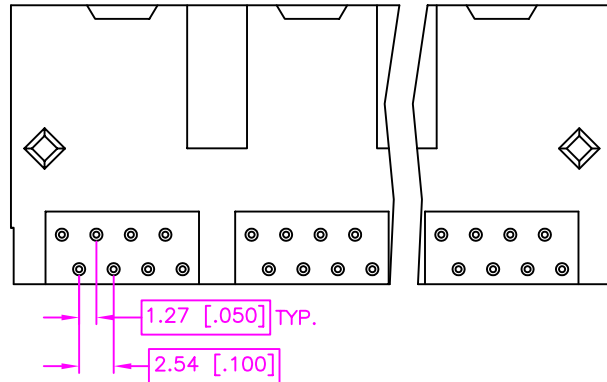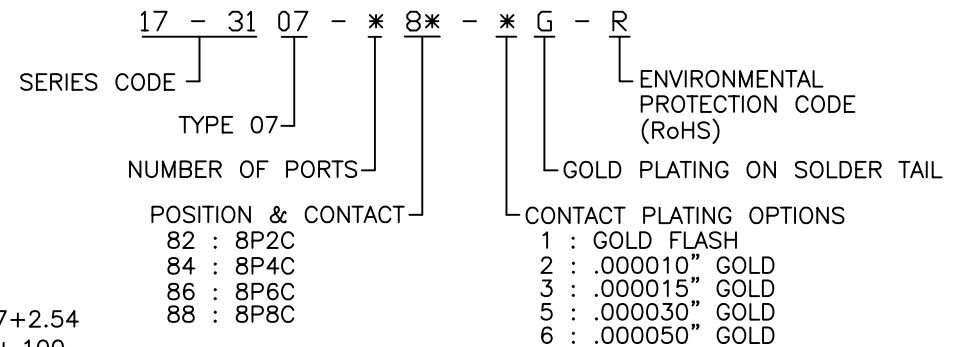

$$A = (\text{NUMBER OF PORTS}) \times 13.97 + 2.54$$

$$A = (\text{NUMBER OF PORTS} \times .550) + .100$$

$$B = (\text{NUMBER OF PORTS} - 1) \times 13.97 + 11.43$$

$$B = (\text{NUMBER OF PORTS} - 1) \times 13.97 + .450$$

TOLERANCE		DRAWER	 WWW.ASTRON.COM.TW
.0=±0.30 [.012]		ANY	
.00=±0.20 [.008]		CHECK	
.000=±.XXX		APP'D	
.0000=±.		PRODUCT SPEC.	
ANG.=±3'			
UNITS : mm [inch]	C564-3108	DRAW NO.	C17-3107-X8X-XG-R
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A
			08015

RECOMMEND P.C.B. LAYOUT
TOP VIEW