
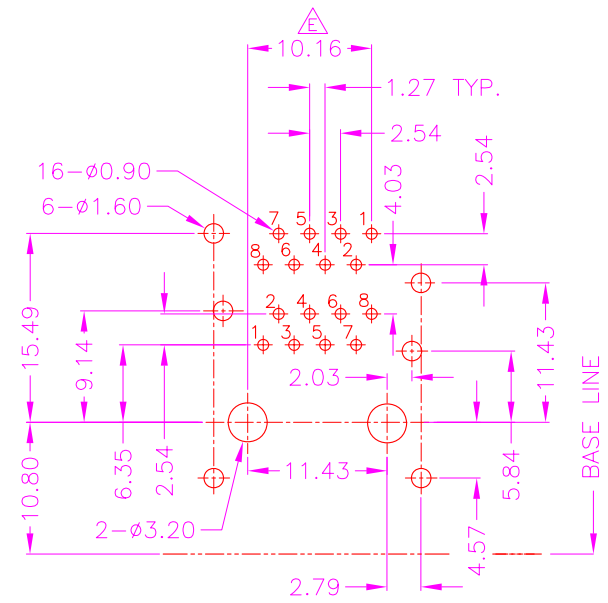
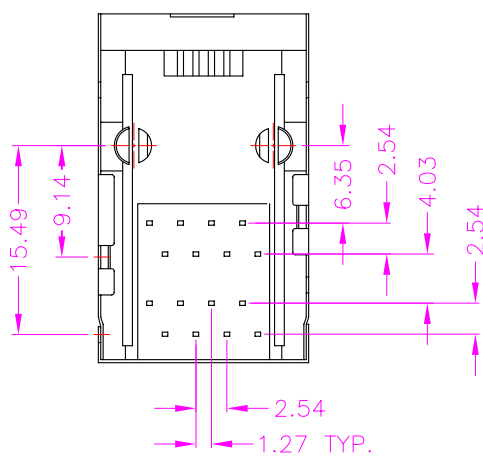
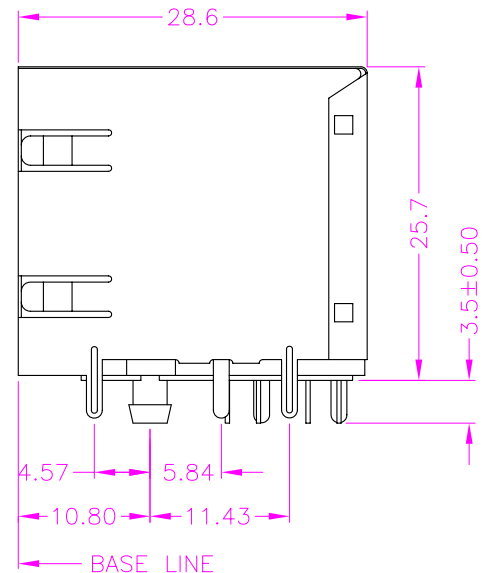


REV.	DESCRIPTION	DATE
A	RELEASE	Aug. 15, 2002
B	DRAW MODIFY	Feb. 06, 2004
C	RoHS MODIFY	May 18, 2005
D	DRAW MODIFY	Dec. 14, 2005
E	DRAW MODIFY	Sep. 08, 2011
F	P/N MODIFY	Jan. 28, 2014

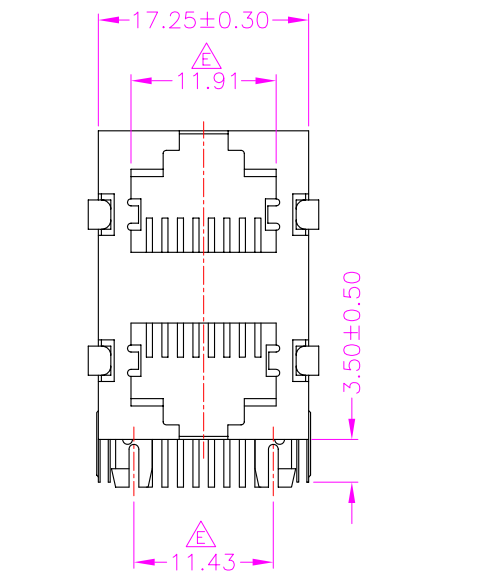

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

- △ 1. HOUSING : THERMOPLASTIC, (UL 94V-0), BLACK.
- 2. TERMINAL : PHOSPHOR BRONZE. (t=0.35mm)
- 3. SHIELD : BRASS, NICKEL PLATING. (t=0.25mm)

SPECIFICATION

- 1. CURRENT RATING : 1.5 AMP. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- 4. CONTACT RESISTANCE : 30m OHMS MAX.
- 5. OPERATING TEMPERATURE : -40°C TO +70°C.
- 6. DURABILITY : 750 CYCLES.

PART NUMBER INFORMATION :

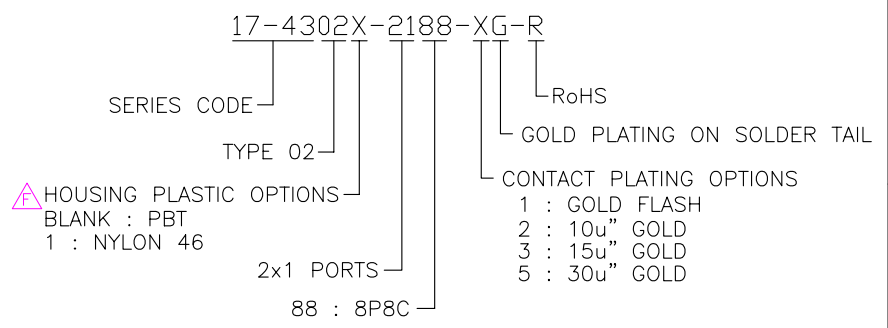

TOLERANCE .0=±0.38 .00=±0.25 .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>JINJ</i>	 WWW.ASTRON.COM.TW
UNITS : mm [inch]		CHECK <i>JANFCE</i>	
SCALE NONE	SIZE A4	APP'D <i>ERJC</i>	DRAW NO. C17-4302X-2188-XG-R
PRODUCT SPEC. —	SHEET 1 OF 1	REV. F	08015